

NEW



AMERICAN STANDARD 48" x 40"

CR4-5



Palgrip

A CONTRIBUTION TO THE CIRCULAR ECONOMY
REUSE & REDUCE WASTE

48"




40"







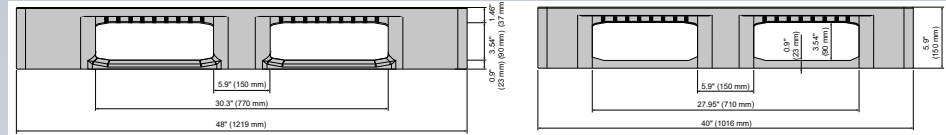

GERMAN ENGINEERING SINCE 1912

CR4-5

48" x 40"




Technical data^{*1}

Dimensions (") L x W x H	48 x 40 x 5.9 (1219 x 1016 x 150 mm)	
Material ^{*2}	HDPE, virgin material	
	without steel rods	with steel rods
Weight (lb)	52 (23.5 kg)	61 (27.5 kg)
Load capacities (lb) ^{*3}	 Static 16500 (7500 kg)	 Static 16500 (7500 kg)
	 Dynamic 2750 (1250 kg)	 Dynamic 3300 (1500 kg)
	 In racking system 2200 (1000 kg)	 In racking system 3100 (1400 kg)

Characteristics

- Color: light blue / blue or black / blue
- **Palgrip**® anti-slip strips on the deck
- Runners: 5
- Lip: 0.2"
- Reinforcement rods: 5
- Temperature stability (°F): -22 to +104, briefly up to 194

Loading quantities (pcs/approx.)

 Container	40' High Cube: 360	 Truck	Dry Van: 448
---	---------------------------	---	---------------------

Labelling options

Customized printing and numbering available on request depending on quantity. Ask about label position options.

^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.



^{*2} Our service team is pleased to be at your disposal if you require exact information about material compositions.

^{*3} Load capacities refer to the equipment with 5 reinforcement rods.

Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68 °F.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 hours at a room temperature of approx. 68 °F.



Do you have questions or require further information? We are happy to advise you.

Germany (Headquarters Export Department)
Craemer GmbH
 Brocker Straße 1
 33442 Herzebrock-Clarholz | Germany
 Tel.: +49 5245 43-0

United States of America
Craemer US Corporation
 30725 US HWY 19 N #304
 Palm Harbor, FL 34684
 Tel.: +1 (727) 312 8859

www.craemer.com/us

E-mail: info@craemer.com
www.craemer.com/en

E-mail: usa_office@craemer.com
www.craemer.com/us

Palgrip These pallets belong to the Craemer Palgrip® pallet family.